

KT-HD62A/62DB

(NDI Version:KT-HD62AN/62DBN)

HD Video Conference Camera

1080P 60FPS

USB3.0+HDMI+LAN+3G-SDI

20X/30X

POE

NDI®|HX2/FULL NDI® (Optional)

AI Tracking

Auto Framing



Features

■ 1080P HD Resolution:

Applies SONY 1/2.8" CMOS sensor, 2.07 Megapixels, max.1920x1080 high resolution with frame rate up to 60fps.

■ 20X,30X Optical Zoom:

KT-HD62A: 20x optical zoom+16x digital zoom, 58.7° distortion-free horizontal view angle.

KT-HD62DB: 30x optical zoom+16x digital zoom, 58.1° distortion-free horizontal view angle.

■ USB3.0+HDMI+LAN+3G-SDI Full interfaces, Rich Application Scenarios:

USB3.0+HDMI+LAN+3G-SDI full interfaces, support up to 60 frames of 1080p full HD image output, rich application scenarios.

■ Supports Both NDI®|HX2/Full NDI®:

Compatible with all video outputs of current mainstream. All interfaces can output video at the same time. In addition to NDI®|HX2(optional), it can support Full NDI® protocol(optional) with lower delay.

■ Low Light:

Brand new CMOS image sensor with ultra high S/N Ratio can effectively reduce image noise in low light conditions. Applied 2D&3D Digital noise reduction at the same time, it reduces image noise greatly, even in ultra low light conditions, it could still remain the frame clean and clear, S/N Ratio of the image is higher than 50dB.

Remote Control:

Uses RS232, RS422/RS485 serial ports to control multiple cameras with daisy chain.

Signal Transparent Transmission Function of Infrared Remote Controller:

Apart from receiving its own infrared remote controller's signals, it can also receive signals from the consumer's infrared remote controller and send to video conference terminal via VISCA IN port.

Various Video Compression Standards:

Different interfaces support YUY2, H.265, MJPG, H.264 multiple video compression formats.

Various Network Protocols:

Supports ONVIF, SRT, RTSP, RTMP, RTMPS, NDI®/HX2 (optional) and other network protocols.

Multiple Control Protocols:

Supports VISCA (including VISCA Over IP), PELCO P/D, NDI® (optional) protocol, and automatically identifies protocols.

Various Installation Methods:

A variety of installation methods, desktop, ceiling, wall installation.

New generation AI human tracking algorithm:

Upgraded to support AI intelligent tracking and automatic framing functions.


Specifications

Image Parameters	
Resolution	HDMI: 1080p60/59.94/50/30/29.97/25, 1080i60/59.94/50, 720p60/50 SDI: 1080p60/59.94/50/30/29.97/25, 1080i60/59.94/50, 720p60/50
Image Sensor	SONY 1/2.8" CMOS
Pixels	3.50 Megapixels, 2.07 Effective Megapixels
Scan Mode	Line by line
Lens	HD62A: 20X Optical Zoom, f=5.2mm(W)~104mm(T), F1.55~3.13 HD62DB: 30X Optical Zoom, f=5.2mm(W)~156mm(T), F1.3~F4.8
Digital Zoom	16X
Horizontal View Angle	HD62A: 58.7°(W)~3.2°(T) HD62DB: 58.1°(W)~2.14°(T)
Vertical View Angle	HD62A: 32.2°(W)~1.8°(T) HD62DB: 33.8°(W)~1.2°(T)
Focus System	Auto, Manual
Shutter Speed	1/50s ~ 1/10000s
Minimum Illumination	0.1 Lux @ (F1.3, AGC ON)
Exposure	Auto, Manual, Iris Priority, Shutter Priority, Brightness priority
White Balance	Auto, Indoor, Outdoor, Keying, Auto Tracking, Manual
Backlight Compensation	Support
Digital Noise Reduction	2D&3D Digital noise reduction

S/N Ratio	≥50dB
Pan/Tilt	
Pan Angle	355°
Tilt Angle	-30°~+90°
Pan Speed	1°~80°/s
Tilt Speed	1°~60°/s
Preset Positions	9 preset positions by IR remote controller, 255 preset positions by joystick controller or PC
Preset Accuracy	0.1°±10%
Flip	Support
Image Freeze	Support
POE	802.3af
AI	
AI Tracking	Support
Auto Framing	Support
Tracking Size	Support
Tracking Sensitivity	Support
AI Guard Position	Support
USB	
Protocol	UVC 1.1
Operating System	Window7 and above, MacOS, Linux, Android
Video Compression	YUY2, MJPEG
Resolution	1920*1080, 1280*720, 960*540, 800*600, 720*576, 720*480, 640*480, 640*360, 352*288, 320*240
Frame Rate	Max.60
UVC Control	Support
LAN	
Protocol	TCP/IP, HTTP, RTSP, RTMP, RTMPS, SRT, Onvif, DHCP, VISCA Over IP, NDI@HX2 (Optional), Full NDI@ (Optional)
Video Compression	H.264, H.265
Code Stream	Main code stream*1, Sub code stream*1
Main Stream Resolution	1920*1080, 1280*960, 1280*720, 720*576, 720*480, 640*480
Sub Stream Resolution	640*480, 640*360, 480*360, 352*288, 320*240, 176*144
Bitrate Control	VBR, CBR
Audio	
Audio Compression	AAC
Audio Bit Rate	128kbps
Interface	
HDMI Interface	1 Line, HDMI: Version 1.4
SDI Interface	1 Line, 3G-SDI
USB Interface	1 Line, USB3.0, Type-B Socket
Network Interface	1 Line, RJ45: 10M/100M adaptive Ethernet port
Audio Interface	1 Line, Line In, 3.5mm

Serial Interface	1 Line, RS232 IN/Out: 8-Pin Mini Din, up to 30 meters, VISCA/Pelco-D/Pelco-P Protocol. 1 Line, RS422/485: 9-Core Phoenix Interface, up to 1200 meters, VISCA/Pelco-D/Pelco-P Protocol.
Power Interface	JEITA RC-5320A Type 4
General Specifications	
Tally Light	Support
Input Voltage	DC 12V
Input Current	Max.1.5A
Power Consumption	Max.18W
Operating Temperature	0~40℃
Storage Temperature	-10~60℃
Color	Black, White (Optional)
Dimension	(W)126*(D)189*(H)198mm
Weight	1.3kg
Accessories	DC 12V power adapter, IR Remote, User manual, USB3.0 Cable, RS-232C Cable, Ceiling bracket, Wall bracket(Optional)

Dimension

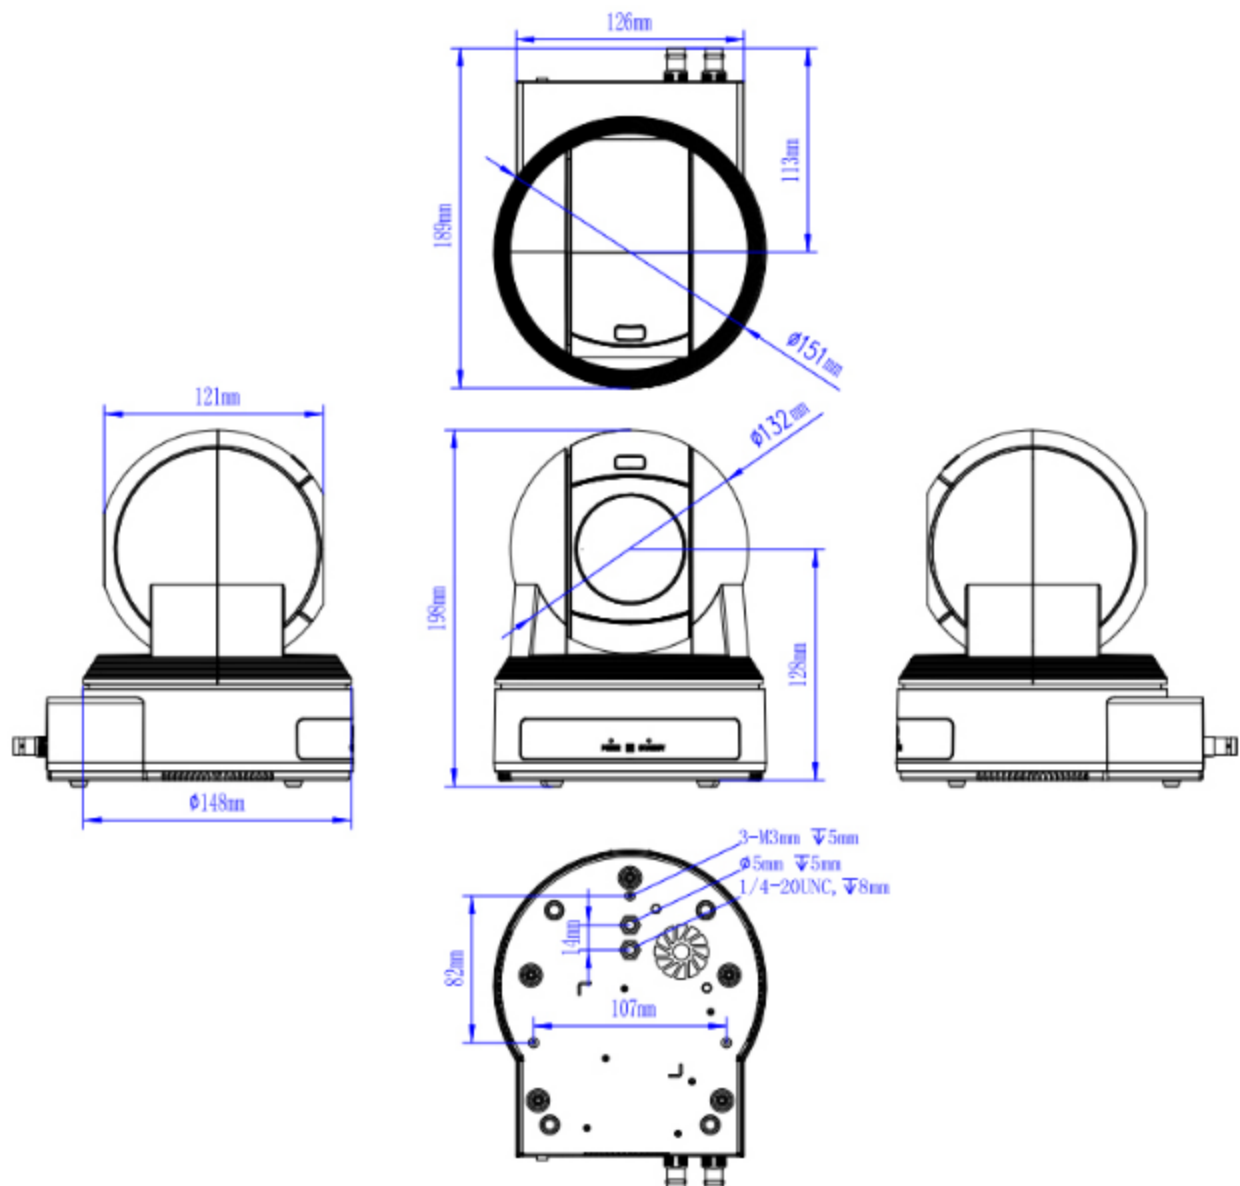

Application scenarios



Connection

